

## AMY-110-WW-C

~60° wide beam. Assembly with holder C compatible with LEDiL HEKLA. Black version.

### SPECIFICATION:

Dimensions	Ø 109.7 mm
Height	23.4 mm
ROHS compliant	yes ⓘ




### MATERIALS:

Component	Type	Material	Colour	Finish
AMY-110-WW	Single lens	PMMA	clear	
AMY-110-HLD-C	Holder C	PC	black	

### ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
CP18574_AMY-110-WW-C » Box size: 480 x 280 x 300 mm	77	77	7	9.3

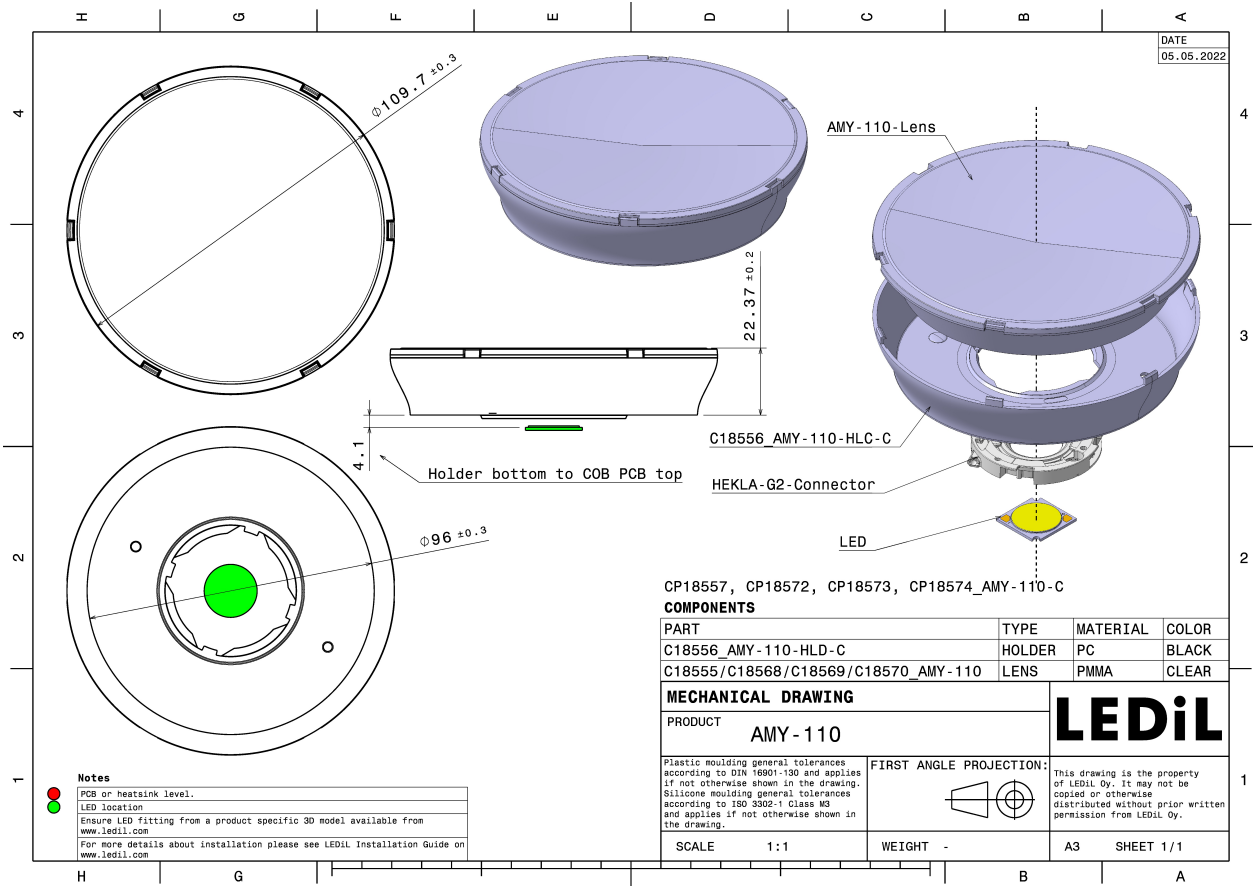


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)



### OPTICAL RESULTS (MEASURED):




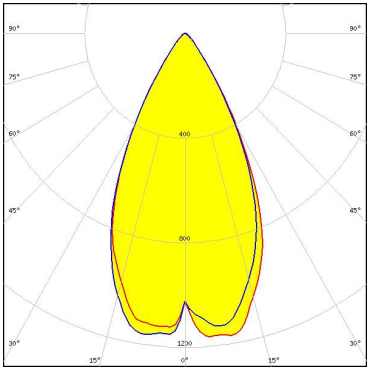

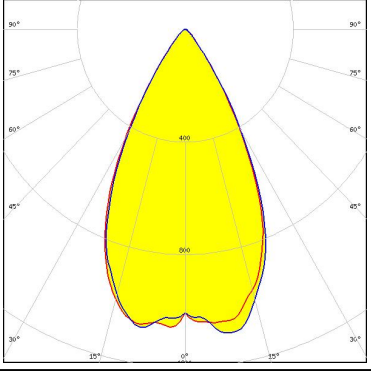

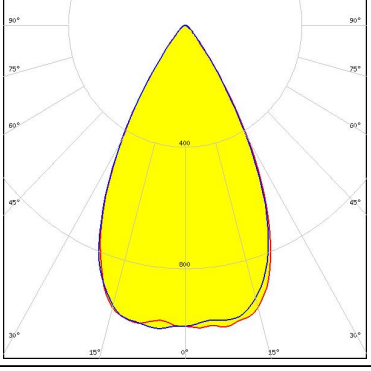

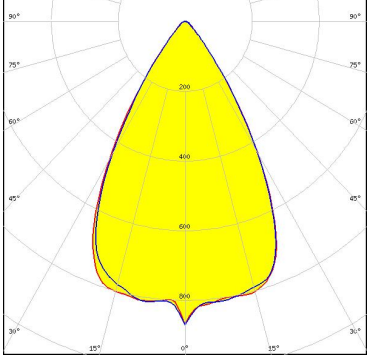
LED CTM-14 (Tunable White) Gen2  
FWHM / FWTM 57.0° / 81.0°  
Efficiency 86 %  
Peak intensity 1 cd/m  
LEDs/each optic 1  
Light colour Tunable White  
Required components:  
C16142\_HEKLA-SOCKET-K  
Bender Wirth: 442 Typ L8

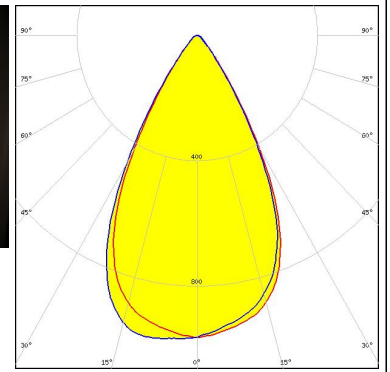

LED LC016D / LC019D / LC026D / LC033D  
FWHM / FWTM 60.0° / 84.0°  
Efficiency 87 %  
Peak intensity 0.9 cd/m  
LEDs/each optic 1  
Light colour White  
Required components:  
F17438\_HEKLA-G2-I

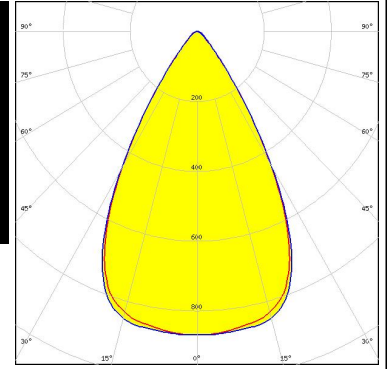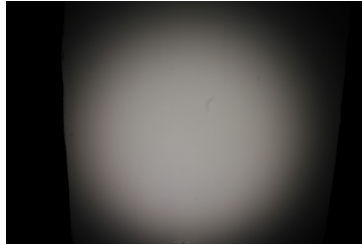


#### OPTICAL RESULTS (SIMULATED):

<p></p> <p>LED V10 Gen 8</p> <p>FWHM / FWTM 53.0 + 52.0° / 78.0 + 77.0°</p> <p>Efficiency 89 %</p> <p>Peak intensity 1.2 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: F15255_HEKLA-SOCKET-C</p>	
<p></p> <p>LED V11 HD Gen 8</p> <p>FWHM / FWTM 55.0 + 54.0° / 78.0°</p> <p>Efficiency 88 %</p> <p>Peak intensity 1.1 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: F15859_HEKLA-SOCKET-I</p>	
<p></p> <p>LED V13 Gen 8</p> <p>FWHM / FWTM 57.0° / 80.0°</p> <p>Efficiency 88 %</p> <p>Peak intensity 1 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: F15859_HEKLA-SOCKET-I</p>	
<p></p> <p>LED V18 Gen 8</p> <p>FWHM / FWTM 60.0° / 84.0°</p> <p>Efficiency 82 %</p> <p>Peak intensity 0.9 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 462 Typ L8</p>	

#### OPTICAL RESULTS (SIMULATED):


bridgelux.

LED V8 Gen 8  
 FWHM / FWTM 50.0° / 76.0 + 74.0°  
 Efficiency 89 %  
 Peak intensity 1.3 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 F15253\_HEKLA-SOCKET-A

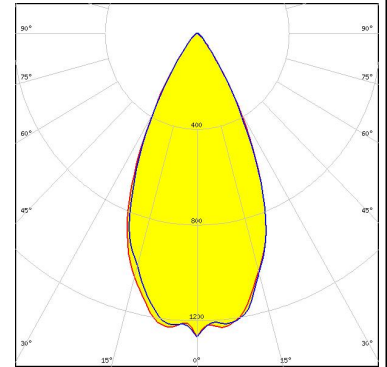


bridgelux.

LED V9 HD Gen 8  
 FWHM / FWTM 52.0 + 53.0° / 76.0 + 77.0°  
 Efficiency 88 %  
 Peak intensity 1.2 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 F15859\_HEKLA-SOCKET-I

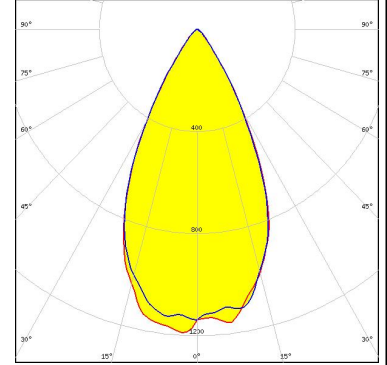


bridgelux.

LED Vero SE 29  
 FWHM / FWTM 62.0° / 88.0°  
 Efficiency 76 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:




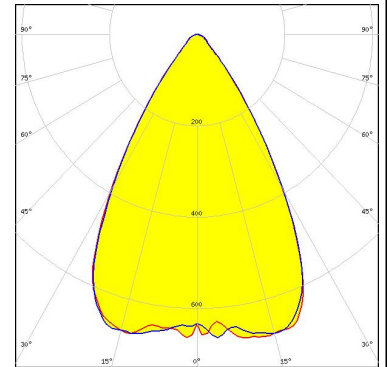


bridgelux.


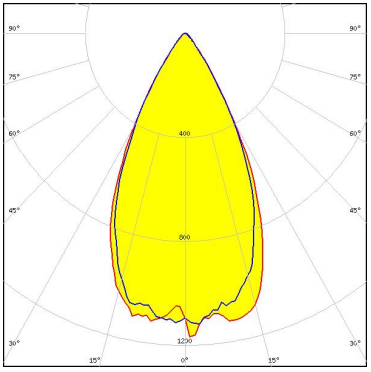

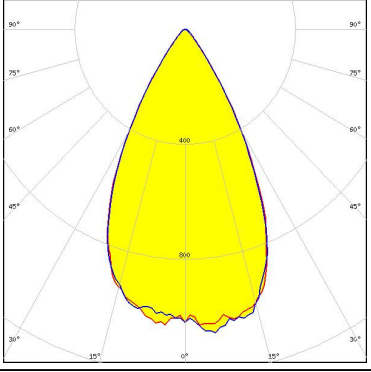

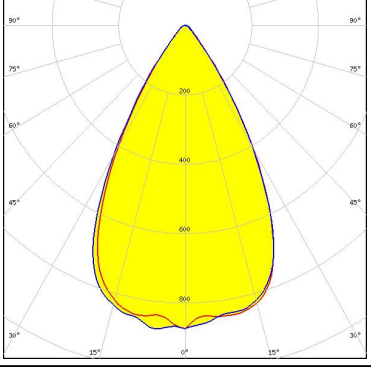

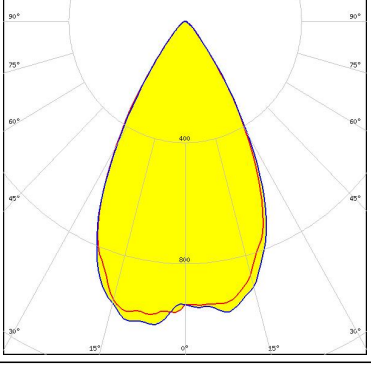
LED VERO13  
 FWHM / FWTM 58.0° / 82.0°  
 Efficiency 89 %  
 Peak intensity 1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 C16142\_HEKLA-SOCKET-K

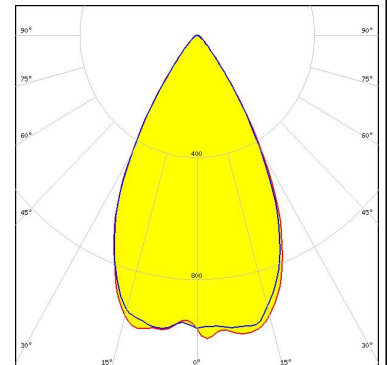

#### OPTICAL RESULTS (SIMULATED):
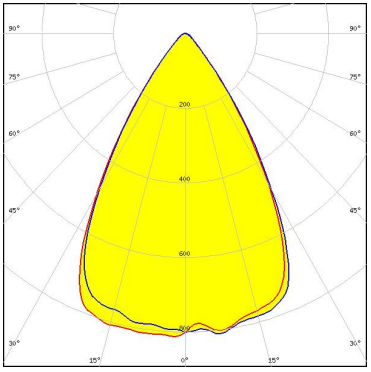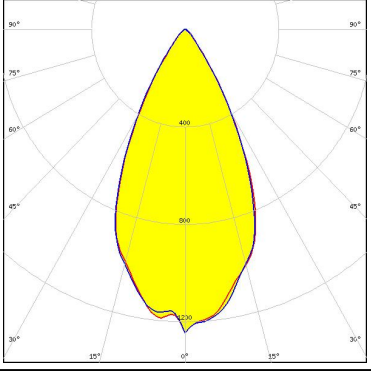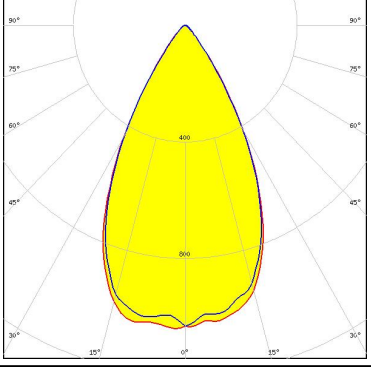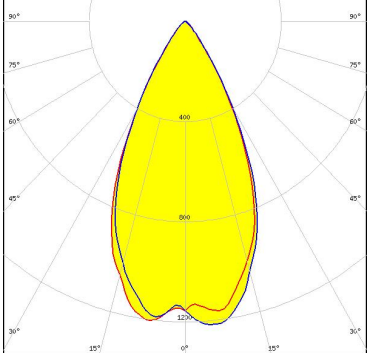
<p>bridgelux.</p> <p>LED VERO18</p> <p>FWHM / FWTM 63.0 + 64.0° / 86.0°</p> <p>Efficiency 87 %</p> <p>Peak intensity 0.8 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: C16142_HEKLA-SOCKET-K</p>	
<p>bridgelux.</p> <p>LED Vesta DTW 13mm (21W)</p> <p>FWHM / FWTM 51.0 + 50.0° / 76.0°</p> <p>Efficiency 89 %</p> <p>Peak intensity 1.2 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: Bender Wirth: 632b Hekla XL</p>	
<p>bridgelux.</p> <p>LED Vesta DTW 15mm (33W)</p> <p>FWHM / FWTM 56.0° / 80.0°</p> <p>Efficiency 87 %</p> <p>Peak intensity 1 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: Bender Wirth: 632b Hekla XL</p>	
<p>bridgelux.</p> <p>LED Vesta DTW 9mm (4W/6W/12W)</p> <p>FWHM / FWTM 51.0° / 76.0°</p> <p>Efficiency 89 %</p> <p>Peak intensity 1.2 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: Bender Wirth: 652b Hekla</p>	


#### OPTICAL RESULTS (SIMULATED):

<p></p> <p>LED Vesta TW 13mm (18W) DP</p> <p>FWHM / FWTM 53.0 + 52.0° / 76.0 + 77.0°</p> <p>Efficiency 87 %</p> <p>Peak intensity 1.2 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour Tunable White</p> <p>Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 492 Typ L8</p>	
<p></p> <p>LED Vesta TW 15mm DP</p> <p>FWHM / FWTM 56.0 + 54.0° / 78.0°</p> <p>Efficiency 87 %</p> <p>Peak intensity 1.1 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour Tunable White</p> <p>Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 482 Typ L8</p>	
<p></p> <p>LED Vesta TW 18mm (31W) DP</p> <p>FWHM / FWTM 59.0° / 82.0°</p> <p>Efficiency 82 %</p> <p>Peak intensity 0.9 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour Tunable White</p> <p>Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 462 Typ L8</p>	
<p></p> <p>LED Vesta TW 9mm (9W) DP</p> <p>FWHM / FWTM 58.0 + 57.0° / 82.0°</p> <p>Efficiency 89 %</p> <p>Peak intensity 1 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour Tunable White</p> <p>Required components: C16142_HEKLA-SOCKET-K Bender Wirth: 489 Typ L8</p>	

### OPTICAL RESULTS (SIMULATED):


#### CITIZEN

LED CLL03x/CLU03x  
 FWHM / FWTM 56.0° / 80.0°  
 Efficiency 87 %  
 Peak intensity 1.1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 F17438\_HEKLA-G2-I

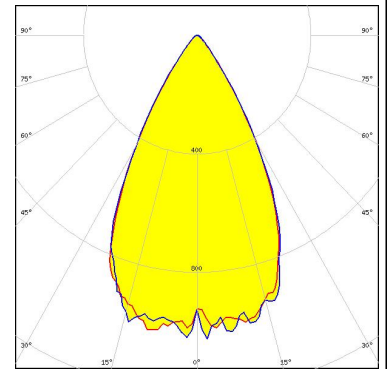


#### LUMILEDS

LED LUXEON CoB 1204/1205  
 FWHM / FWTM 55.0 + 56.0° / 78.0°  
 Efficiency 89 %  
 Peak intensity 1.1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 Bender Wirth: 632a Hekla XL

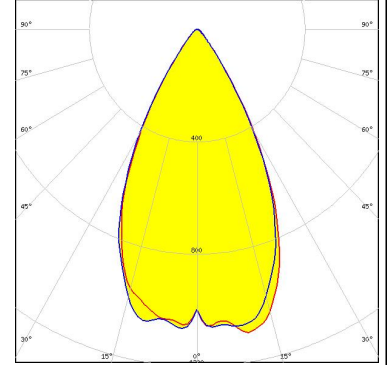


#### LUMILEDS

LED LUXEON CoB 1205HD  
 FWHM / FWTM 54.0 + 56.0° / 78.0°  
 Efficiency 88 %  
 Peak intensity 1.1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 F15858\_HEKLA-SOCKET-H

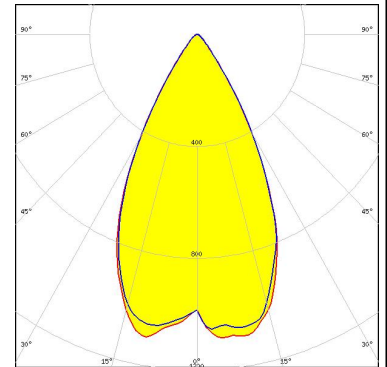

#### LUMILEDS

LED LUXEON CoB 1208  
 FWHM / FWTM 56.0° / 79.0 + 80.0°  
 Efficiency 88 %  
 Peak intensity 1.1 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:  
 Bender Wirth: 632a Hekla XL

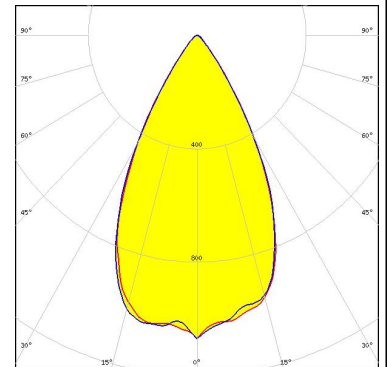




### OPTICAL RESULTS (SIMULATED):


#### LUMILEDS

LED LUXEON CoB 1211  
FWHM / FWTM 61.0 + 62.0° / 85.0 + 86.0°  
Efficiency 86 %  
Peak intensity 0.9 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
Bender Wirth: 631b Hekla XL

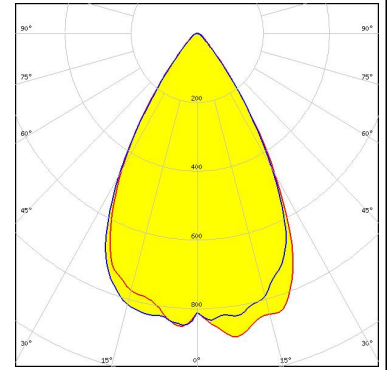

#### LUMILEDS

LED LUXEON CoB 1213/1216/1812  
FWHM / FWTM 68.0° / 91.0 + 92.0°  
Efficiency 79 %  
Peak intensity 0.7 cd/lm  
LEDs/each optic 1  
Light colour White  
Required components:  
Bender Wirth: 631b Hekla XL

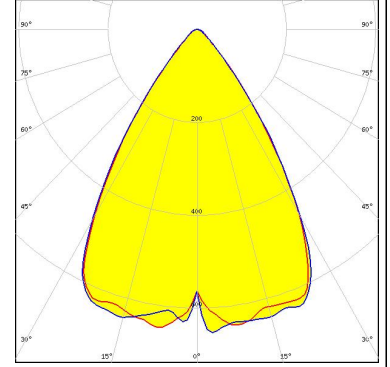

### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Salo, Finland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)