

EMILY-W

~40° wide beam 14.74 mm high lens.

SPECIFICATION:

Dimensions	Ø 26.0
Height	14.7 mm
Fastening	tape, pin
ROHS compliant	yes ⓘ




MATERIALS:

Component	Type	Material	Colour	Finish	Length (mm)
EMILY-W	Single lens	PMMA	clear		
SPUTNIK-TAPE	Tape	Acryl tape	black		

ORDERING INFORMATION:

Component		Qty in box	MOQ	MPQ	Box weight (kg)
CA11934_EMILY-W	Single lens	1690	260	130	11.8
» Box size: 480 x 280 x 300 mm					


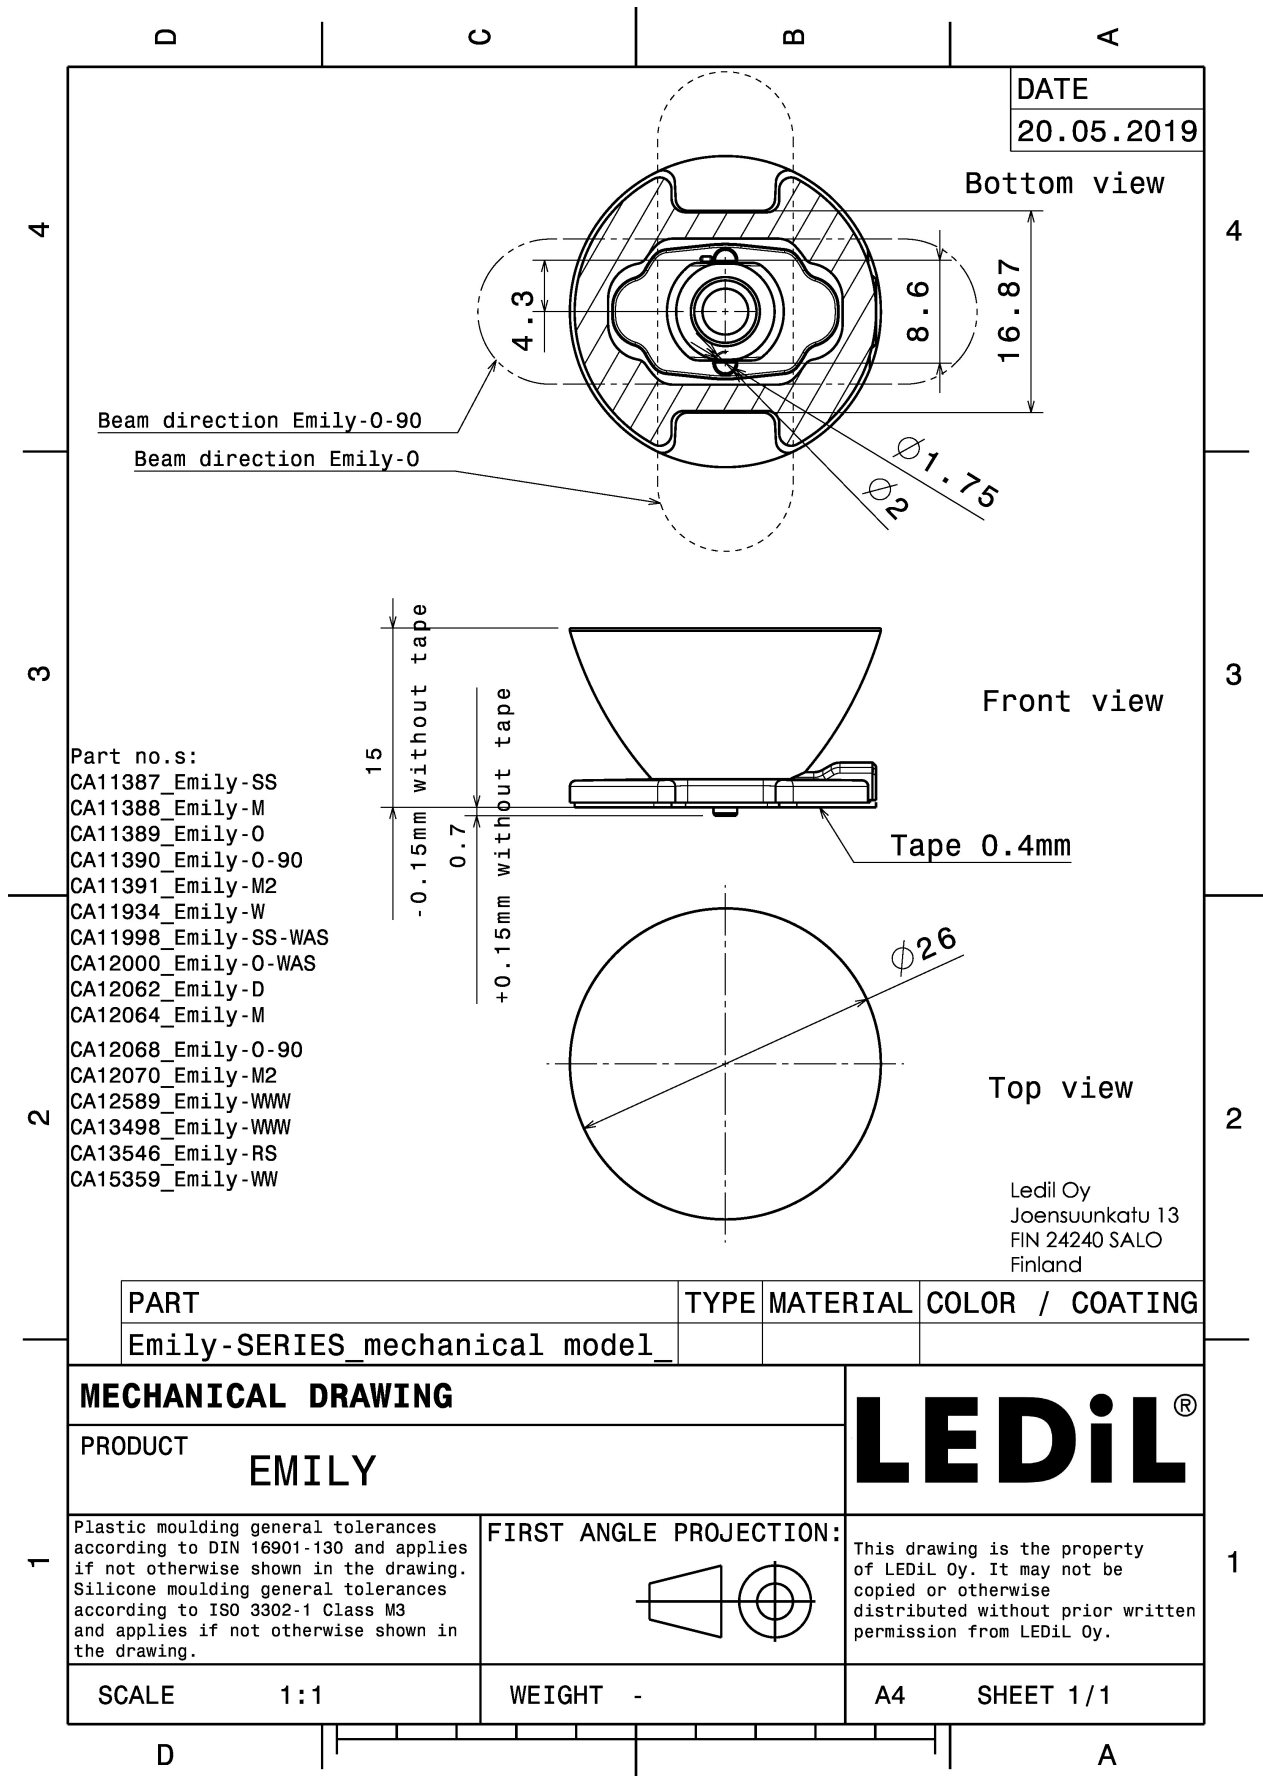


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (MEASURED):




LED XHP35 HD
FWHM / FWTM 39.0° / 72.0°
Efficiency 83 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

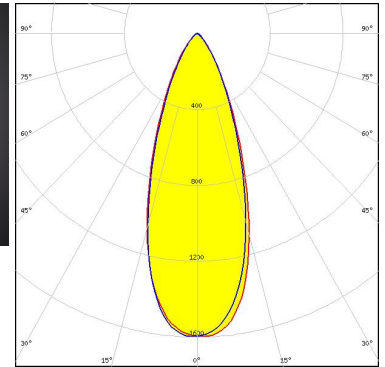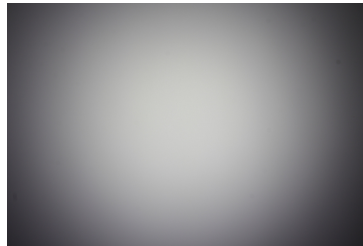

Light distribution files





LED XM-L
FWHM / FWTM 36.0°
Efficiency 86 %
LEDs/each optic 1
Light colour/type White
Required components:

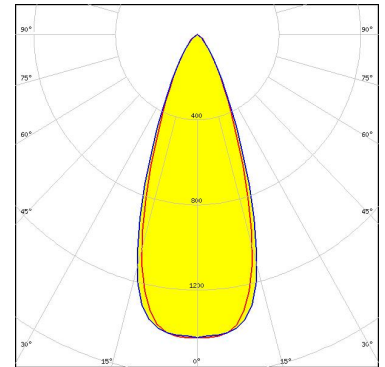

Light distribution files



LED XM-L2
FWHM / FWTM 39.0° / 72.0°
Efficiency 86 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

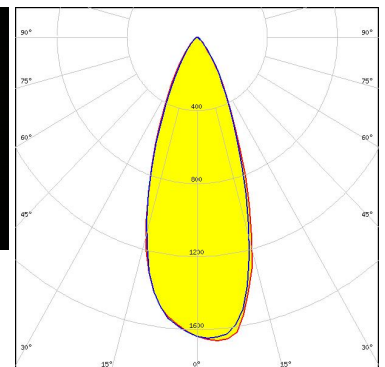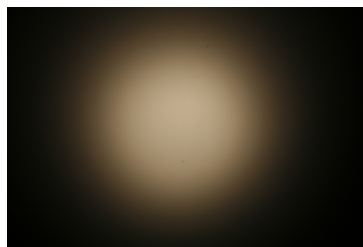


Light distribution files

OPTICAL RESULTS (MEASURED):





LED XP-E
 FWHM / FWTM 39.0° / 64.0°
 Efficiency 86 %
 Peak intensity 1.6 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

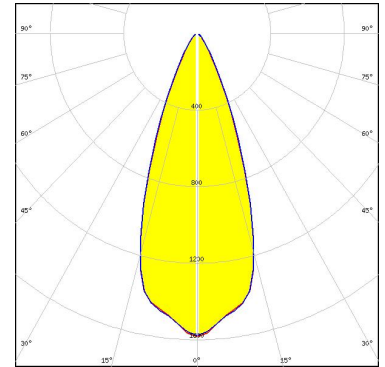

Light distribution files




LED XP-E2
 FWHM / FWTM 39.0° / 67.0°
 Efficiency 84 %
 Peak intensity 1.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

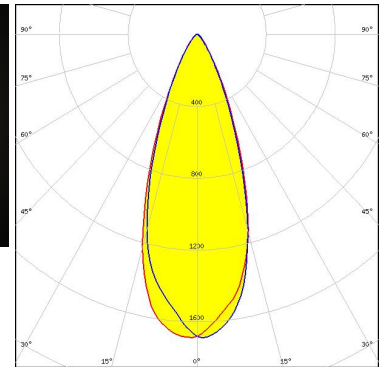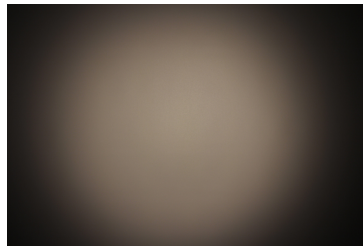

Light distribution files



LED XP-G
 FWHM / FWTM 40.0° / 68.0°
 Efficiency 86 %
 Peak intensity 1.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

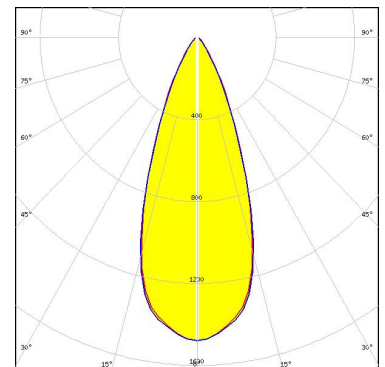


Light distribution files

OPTICAL RESULTS (MEASURED):





LED XP-G2
 FWHM / FWTM 38.0° / 66.0°
 Efficiency 84 %
 Peak intensity 1.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

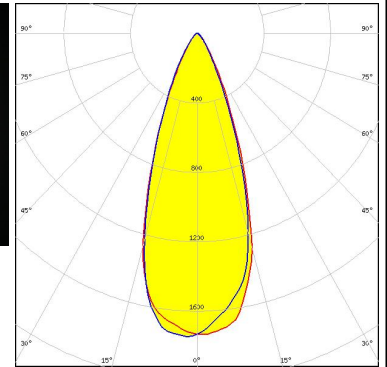

Light distribution files





LED XP-G3
 FWHM / FWTM 36.0° / 70.0°
 Efficiency 92 %
 Peak intensity 1.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

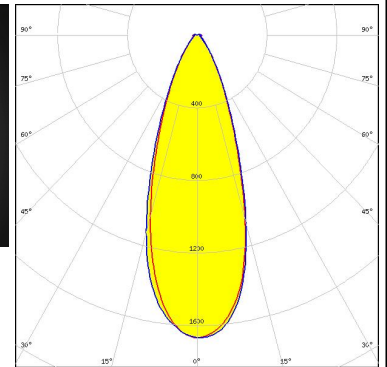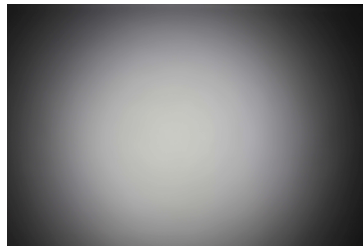

Light distribution files



LED XP-L HD
 FWHM / FWTM 38.0° / 71.0°
 Efficiency 87 %
 Peak intensity 1.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

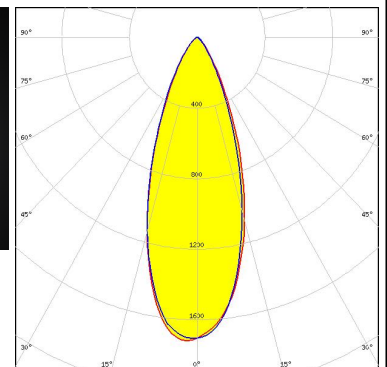
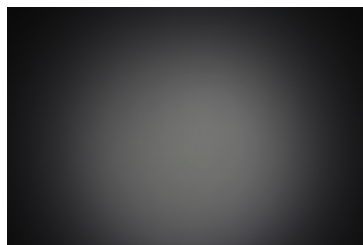


Light distribution files

OPTICAL RESULTS (MEASURED):



LED XP-L HI
FWHM / FWTM 36.0° / 65.0°
Efficiency 86 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

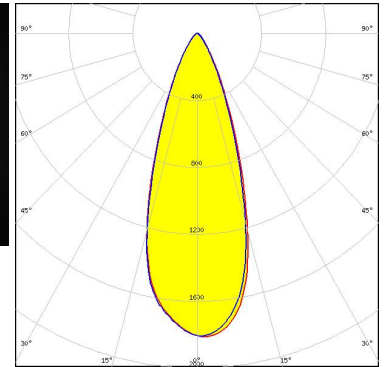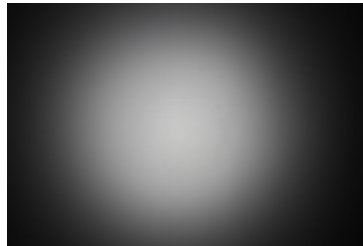

Light distribution files



LED XT-E
FWHM / FWTM 36.0°
Efficiency %
Peak intensity 1.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



LED LUXEON A
FWHM / FWTM 40.0°
Efficiency 84 %
LEDs/each optic 1
Light colour/type White
Required components:

OPTICAL RESULTS (MEASURED):



LED LUXEON Rebel
FWHM / FWTM 40.0°
Efficiency 86 %
LEDs/each optic 1
Light colour/type White
Required components:



LED LUXEON Rebel ES
FWHM / FWTM 40.0°
Efficiency 88 %
LEDs/each optic 1
Light colour/type White
Required components:





LED NCSxx19A
FWHM / FWTM 40.0°
Efficiency 86 %
LEDs/each optic 1
Light colour/type White
Required components:

OPTICAL RESULTS (MEASURED):





LED NS9x383
FWHM / FWTM 34.0° / 67.0°
Efficiency 84 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

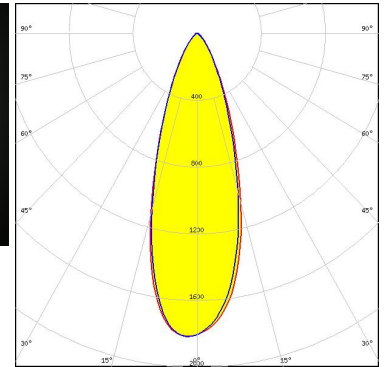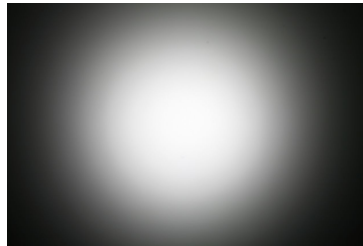

Light distribution files



LED NVSW219F
FWHM / FWTM 38.0° / 69.0°
Efficiency 91 %
Peak intensity 1.6 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

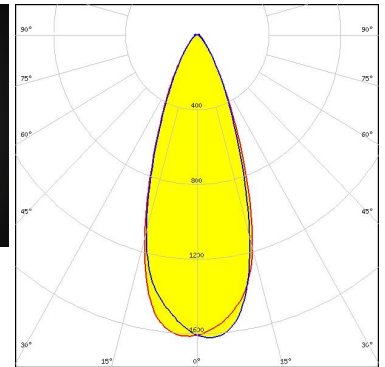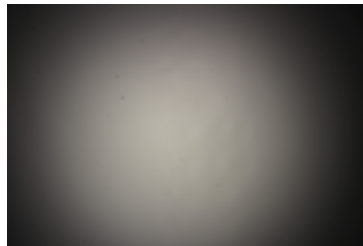

Light distribution files





LED NVSxx19A
FWHM / FWTM 40.0°
Efficiency 86 %
LEDs/each optic 1
Light colour/type White
Required components:

OPTICAL RESULTS (MEASURED):

OSRAM
Opto Semiconductors

LED OSLON Square EC
FWHM / FWTM 38.0° / 68.0°
Efficiency 84 %
Peak intensity 1.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

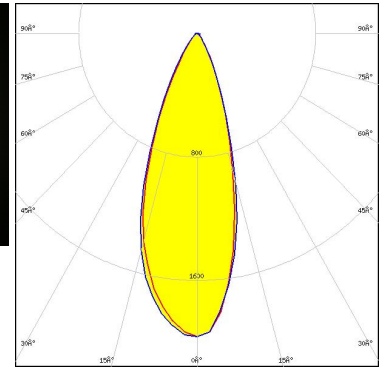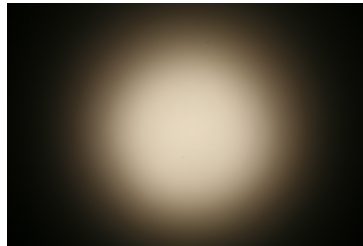


Light distribution files

OSRAM
Opto Semiconductors

LED OSLON SSL 150
FWHM / FWTM 40.0°
Efficiency 86 %
LEDs/each optic 1
Light colour/type White
Required components:

OSRAM
Opto Semiconductors

LED OSLON SSL 80
FWHM / FWTM 40.0° / 70.0°
Efficiency 86 %
Peak intensity 1.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

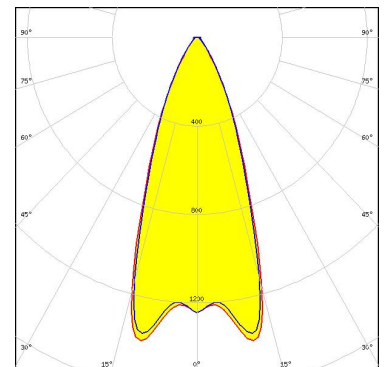


Light distribution files

OPTICAL RESULTS (MEASURED):

SAMSUNG



LED LH351B
FWHM / FWTM 38.0° / 68.0°
Efficiency 88 %
Peak intensity 1.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

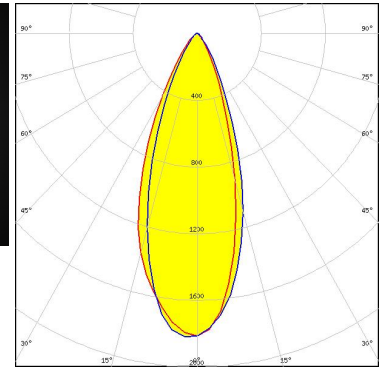

Light distribution files

SAMSUNG

LED LH351Z
FWHM / FWTM 39.0° / 68.0°
Efficiency 85 %
Peak intensity 1.7 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

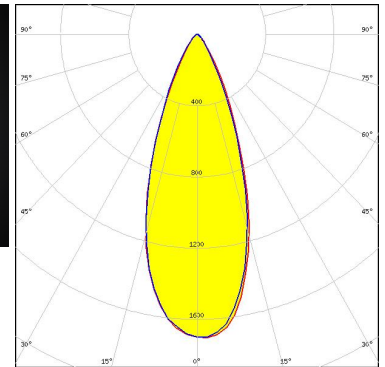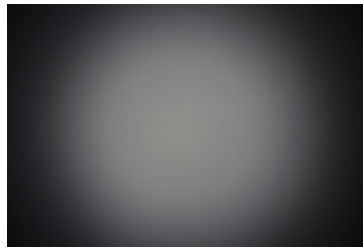


Light distribution files



LED Z5
FWHM / FWTM 40.0°
Efficiency 86 %
LEDs/each optic 1
Light colour/type White
Required components:

OPTICAL RESULTS (MEASURED):

 SEOL SEMICONDUCTOR		
LED	Z8Y22P	
FWHM / FWTM	34.0° / 67.0°	
Efficiency	89 %	
Peak intensity	1.7 cd/lm	
LEDs/each optic	1	
Light colour/type	White	
Required components:		

Light distribution files


SHARP

LED	Double Dome (GM2BB)
FWHM / FWTM	40.0°
Efficiency	86 %
LEDs/each optic	1
Light colour/type	White
Required components:	

OPTICAL RESULTS (SIMULATED):



LED XE-G
FWHM / FWTM 38.0° / 56.0°
Efficiency 97 %
Peak intensity 2.3 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

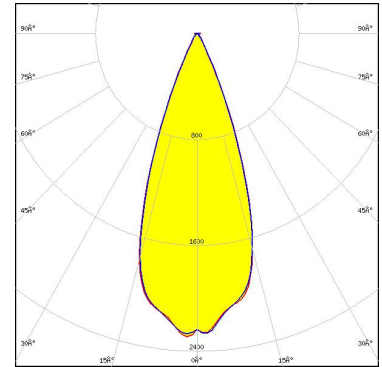


Light distribution files



LED XM-L HVW
FWHM / FWTM 36.0°
Efficiency %
LEDs/each optic 1
Light colour/type White
Required components:



LED XP-G2 HE
FWHM / FWTM 41.0° / 63.0°
Efficiency 96 %
Peak intensity 1.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

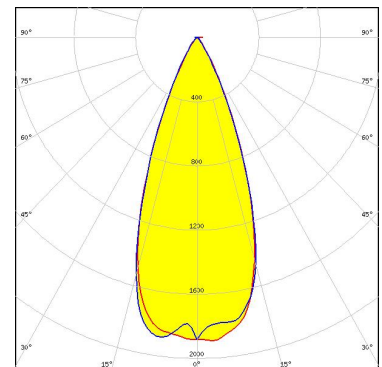


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XP-L2
FWHM / FWTM 38.0° / 60.0°
Efficiency 95 %
Peak intensity 2.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

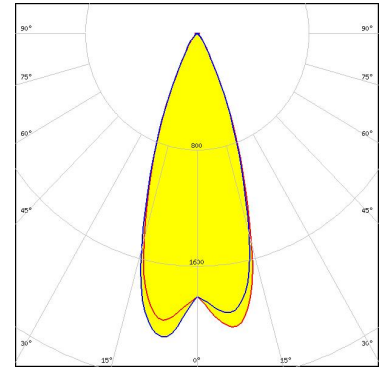

Light distribution files




LED LUXEON C
FWHM / FWTM 35.0° / 54.0°
Efficiency 93 %
Peak intensity 2.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

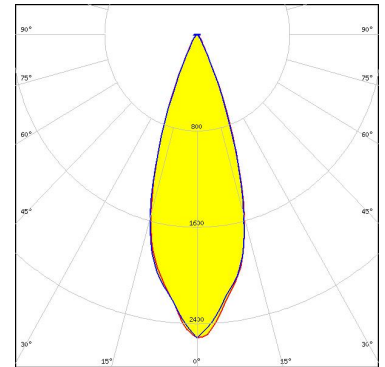

Light distribution files



LED LUXEON HL2X
FWHM / FWTM 40.0° / 62.0°
Efficiency 97 %
Peak intensity 2.1 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

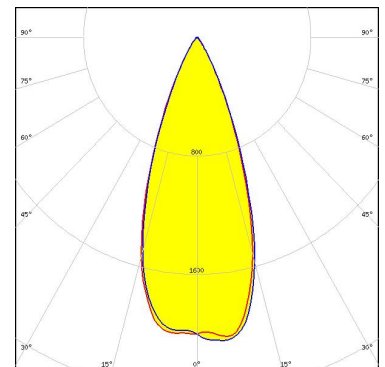


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED LUXEON HL2Z
 FWHM / FWTM 32.0° / 50.0°
 Efficiency 96 %
 Peak intensity 3.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

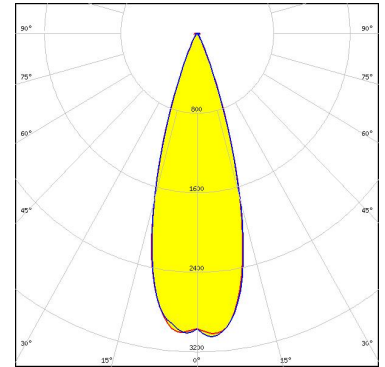

Light distribution files




LED LUXEON MZ
 FWHM / FWTM 34.0° / 56.0°
 Efficiency 96 %
 Peak intensity 2.6 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

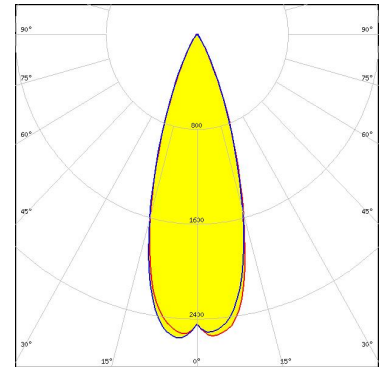

Light distribution files



LED LUXEON SunPlus 20 Line (120 deg)
 FWHM / FWTM 40.0° / 57.0°
 Efficiency 97 %
 Peak intensity 2.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

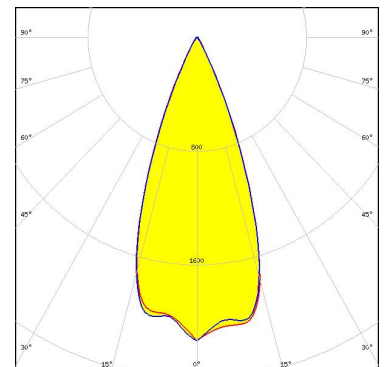


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED LUXEON TX
 FWHM / FWTM 36.0° / 56.0°
 Efficiency 97 %
 Peak intensity 2.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

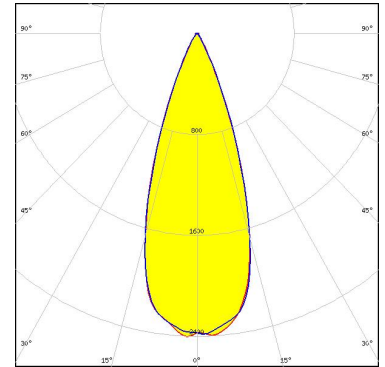

Light distribution files




LED LUXEON Z ES
 FWHM / FWTM 34.0° / 50.0°
 Efficiency 97 %
 Peak intensity 3 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

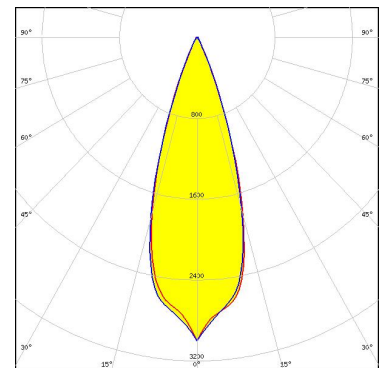

Light distribution files



LED NCSxE17A
 FWHM / FWTM 30.0° / 56.0°
 Efficiency 90 %
 Peak intensity 2.7 cd/lm
 LEDs/each optic 4
 Light colour/type White
 Required components:

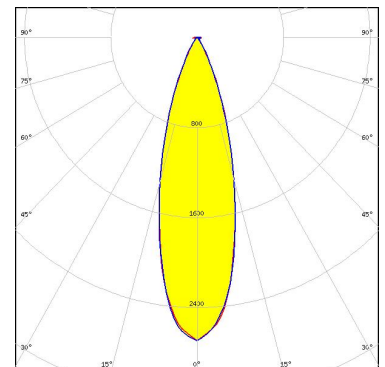


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED NCSxx19B
 FWHM / FWTM 45.0°
 Efficiency 86 %
 Peak intensity 1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

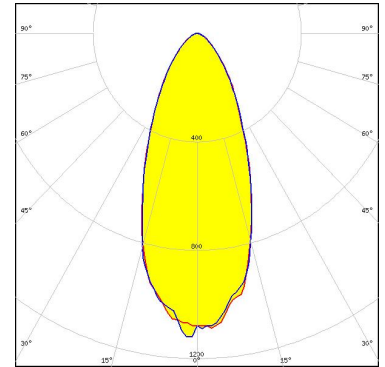

Light distribution files




LED NVSW219D
 FWHM / FWTM 43.0° / 62.0°
 Efficiency 96 %
 Peak intensity 1.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

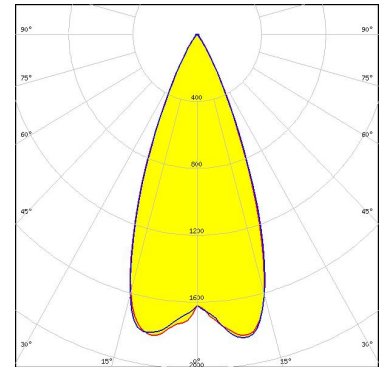

Light distribution files



LED NVSxE21A
 FWHM / FWTM 32.0° / 63.0°
 Efficiency 88 %
 Peak intensity 2.1 cd/lm
 LEDs/each optic 4
 Light colour/type White
 Required components:

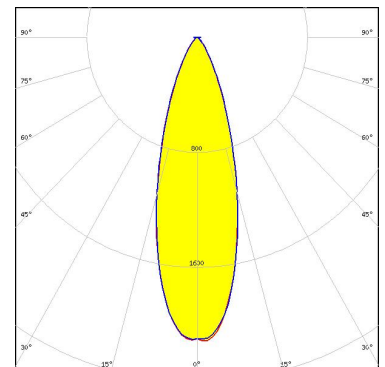


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED OSCONIQ P 3030
FWHM / FWTM 33.0° / 52.0°
Efficiency 97 %
Peak intensity 2.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

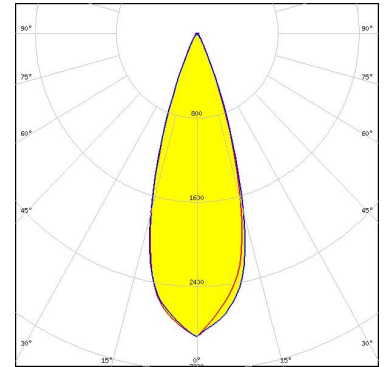

Light distribution files

OSRAM
Opto Semiconductors


LED OSLON Black
FWHM / FWTM 36.0° / 49.0°
Efficiency 94 %
Peak intensity 2.8 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

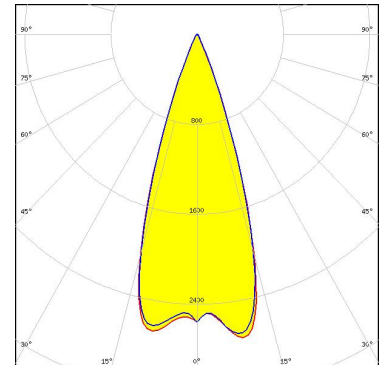

Light distribution files

OSRAM
Opto Semiconductors

LED OSLON Black Flat (LUW HWQP)
FWHM / FWTM 32.0° / 45.0°
Efficiency 94 %
Peak intensity 3.5 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

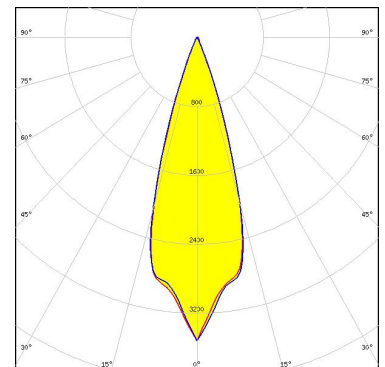


Light distribution files

OPTICAL RESULTS (SIMULATED):

SAMSUNG

LED	LH351D
FWHM / FWTM	40.0° / 63.0°
Efficiency	95 %
Peak intensity	2 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

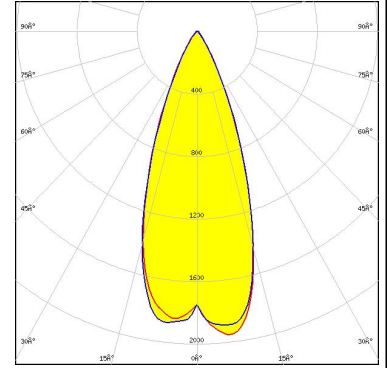

Light distribution files

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 7
FI-24100 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)