

LISA4-RS

~16° spot beam with integrated pins on lens

SPECIFICATION:

| | |
|----------------|--------|
| Dimensions | Ø 10.0 |
| Height | 7.7 mm |
| Fastening | pin |
| ROHS compliant | yes ⓘ |


MATERIALS:

| Component | Type | Material | Colour | Finish | Length (mm) |
|-----------|-------------|----------|--------|--------|-------------|
| LISA4-RS | Single lens | PMMA | clear | | |



ORDERING INFORMATION:

| Component | Qty in box | MOQ | MPQ | Box weight (kg) |
|---|------------|------|------|-----------------|
| C17521_LISA4-RS » Box size: 430 x 390 x 215 mm | 20000 | 1000 | 1000 | 7.5 |

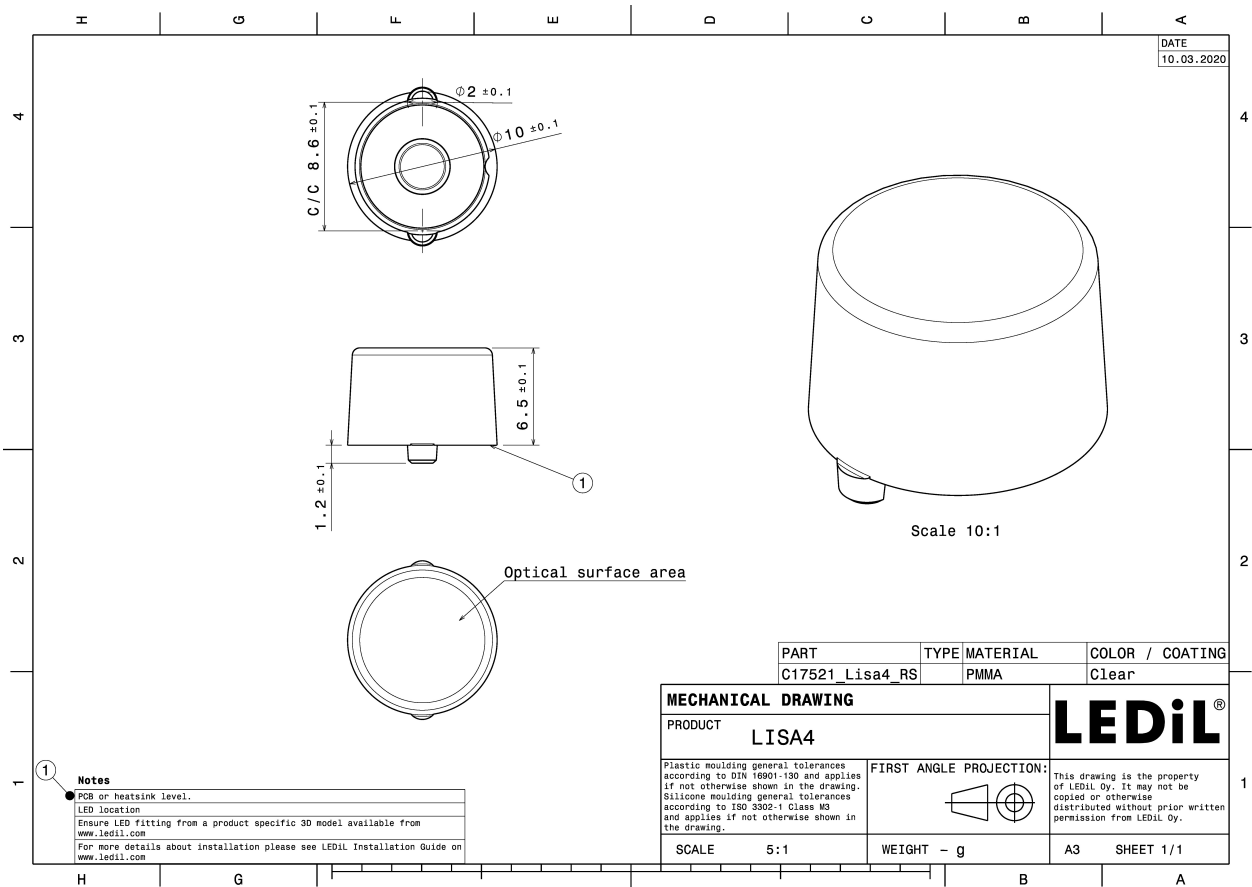


See also our general installation guide: www.ledil.com/installation_guide

OPTICAL RESULTS (SIMULATED):





LED SMD 3535 BXEX
 FWHM / FWTM 30.0° / 55.0°
 Efficiency 93 %
 Peak intensity 2.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

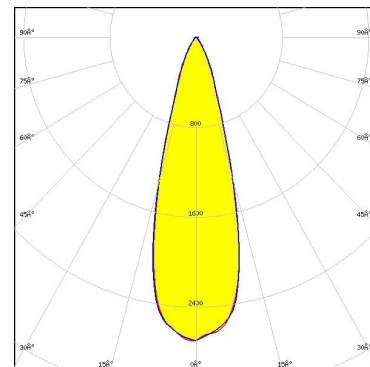

Light distribution files




LED J Series 3030C
 FWHM / FWTM 23.0° / 51.0°
 Efficiency 95 %
 Peak intensity 3.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

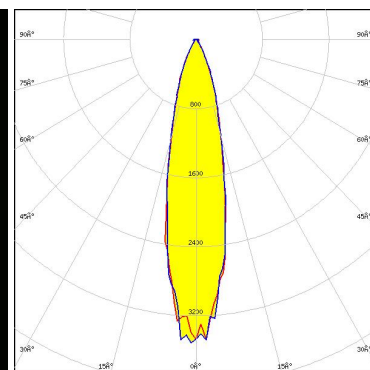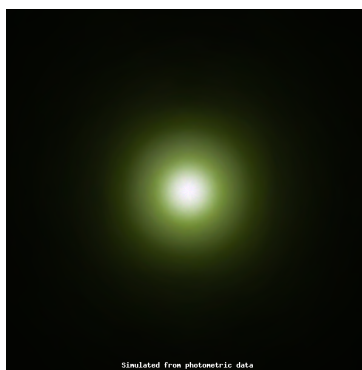

Light distribution files



LED XD16
 FWHM / FWTM 18.0° / 38.0°
 Efficiency 94 %
 Peak intensity 4.8 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

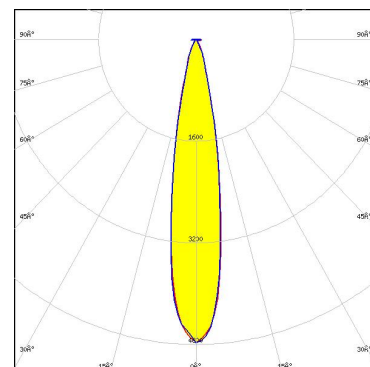


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XE-G
 FWHM / FWTM 16.0° / 33.0°
 Efficiency 93 %
 Peak intensity 6.9 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

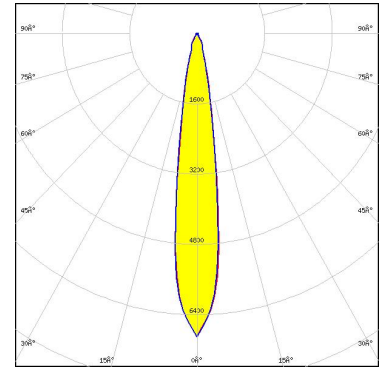

Light distribution files




LED XP-E
 FWHM / FWTM 18.0° / 33.0°
 Efficiency 93 %
 Peak intensity 6.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

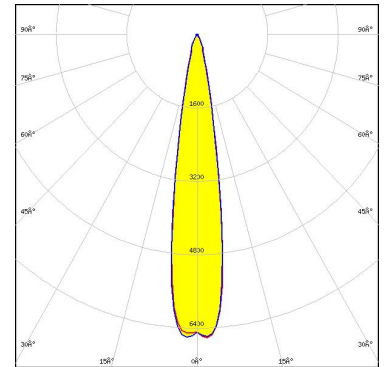

Light distribution files



LED XP-E2
 FWHM / FWTM 16.0° / 32.0°
 Efficiency 95 %
 Peak intensity 7.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

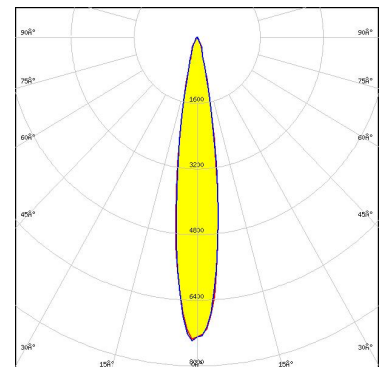


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED XP-G3
 FWHM / FWTM 29.0° / 60.0°
 Efficiency 94 %
 Peak intensity 2.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

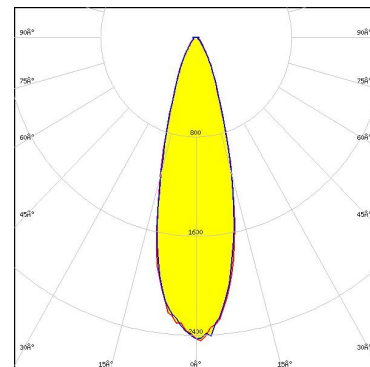

Light distribution files




LED XQ-E HD
 FWHM / FWTM 16.0° / 31.0°
 Efficiency 93 %
 Peak intensity 7.6 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

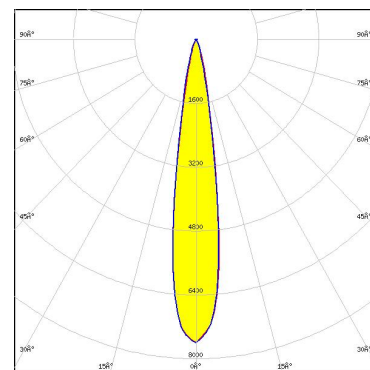

Light distribution files



LED XQ-E HI
 FWHM / FWTM 12.0° / 24.0°
 Efficiency 93 %
 Peak intensity 12.4 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

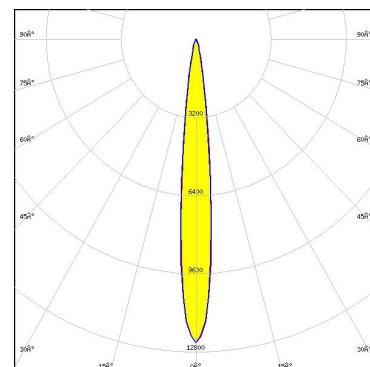


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED LUXEON HL1Z
 FWHM / FWTM 18.0° / 34.0 + 33.0°
 Efficiency 96 %
 Peak intensity 6.4 cd/Im
 LEDs/each optic 1
 Light colour/type White
 Required components:

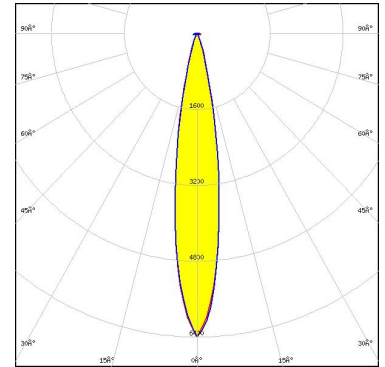

Light distribution files





LED LUXEON Z ES
 FWHM / FWTM 18.0° / 33.0°
 Efficiency 92 %
 Peak intensity 6.7 cd/Im
 LEDs/each optic 1
 Light colour/type White
 Required components:

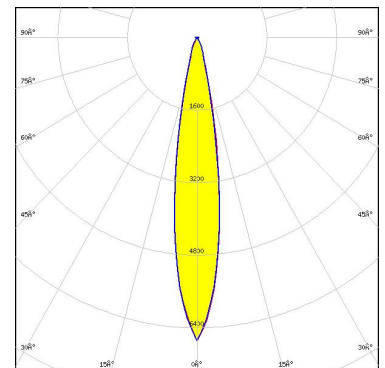

Light distribution files



LED SST-10-IR-B90
 FWHM / FWTM 18.0° / 39.0°
 Efficiency 90 %
 LEDs/each optic 1
 Light colour/type IR
 Required components:

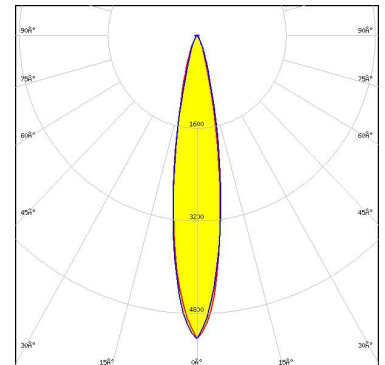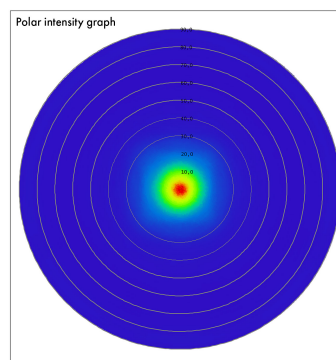


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED SST-12 Gen1
 FWHM / FWTM 18.0° / 36.0°
 Efficiency 95 %
 Peak intensity 5.9 cd/Im
 LEDs/each optic 1
 Light colour/type White
 Required components:

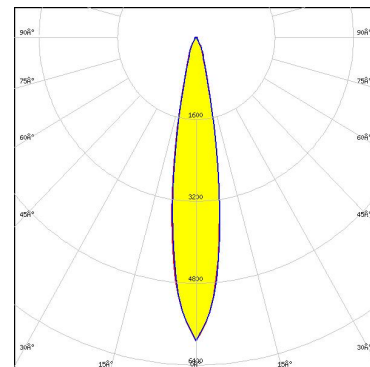

Light distribution files




LED SST-12 Gen2
 FWHM / FWTM 19.0 + 20.0° / 37.0 + 38.0°
 Efficiency 95 %
 Peak intensity 5.4 cd/Im
 LEDs/each optic 1
 Light colour/type White
 Required components:

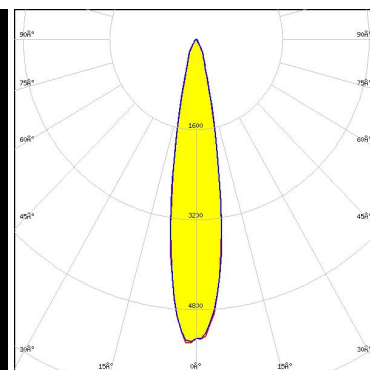

Light distribution files



LED SST-20 Gen1
 FWHM / FWTM 22.0° / 40.0°
 Efficiency 93 %
 Peak intensity 4.7 cd/Im
 LEDs/each optic 1
 Light colour/type White
 Required components:

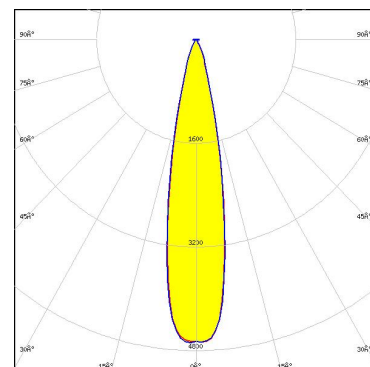


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED SST-20 Gen2
 FWHM / FWTM 23.0 + 22.0° / 44.0°
 Efficiency 95 %
 Peak intensity 4.1 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

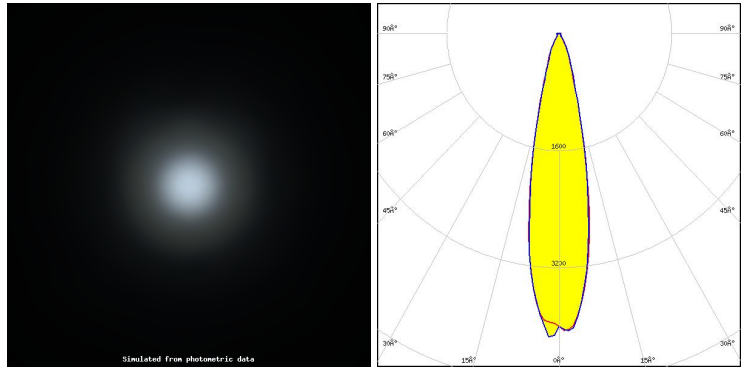

Light distribution files




LED SST-25-W
 FWHM / FWTM 26.0° / 51.0 + 52.0°
 Efficiency 95 %
 Peak intensity 3.2 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

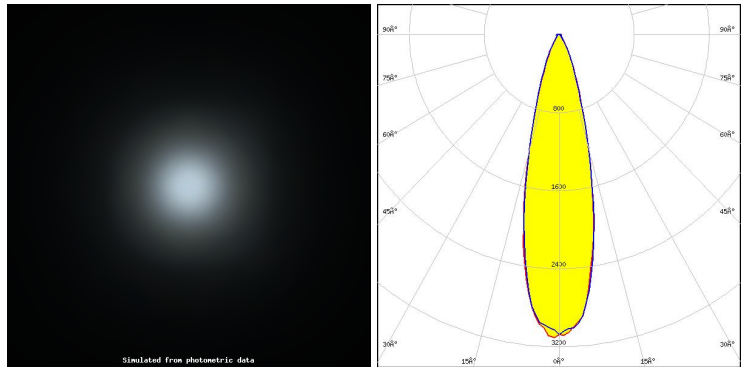

Light distribution files



LED NCSxE17A
 FWHM / FWTM 18.0° / 36.0°
 Efficiency 93 %
 Peak intensity 5.7 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

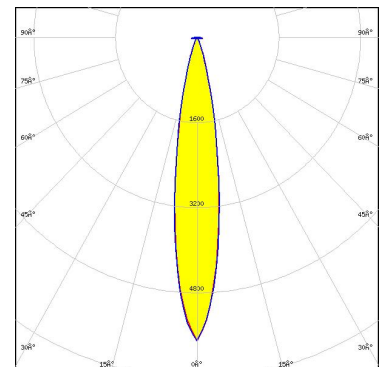


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED NV4WB35AM
 FWHM / FWTM 36.0° / 73.0°
 Efficiency 93 %
 Peak intensity 1.5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

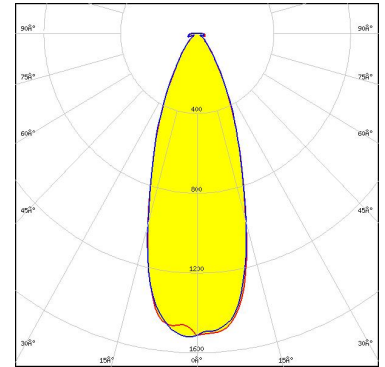

Light distribution files




LED NVSxx19B/NVSxx19C
 FWHM / FWTM 29.0° / 55.0°
 Efficiency 91 %
 Peak intensity 2.6 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

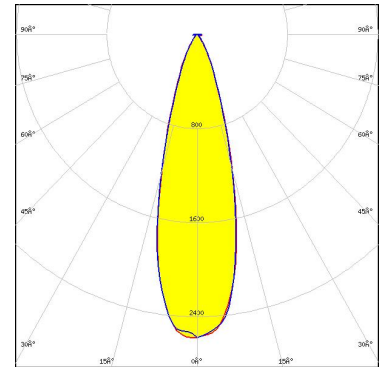

Light distribution files



LED OSCONIQ C 2424
 FWHM / FWTM 20.0° / 41.0°
 Efficiency 95 %
 Peak intensity 5 cd/lm
 LEDs/each optic 1
 Light colour/type White
 Required components:

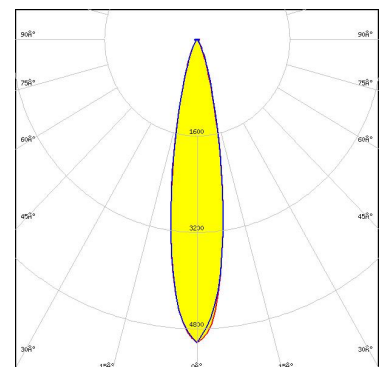


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors


LED OSLON Pure 1414
FWHM / FWTM 14.0° / 28.0°
Efficiency 95 %
Peak intensity 9.4 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

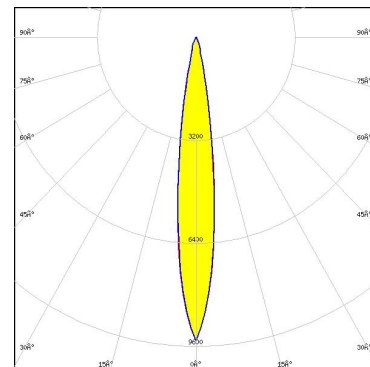

Light distribution files

OSRAM
Opto Semiconductors


LED OSLON Signal
FWHM / FWTM 18.0° / 35.0°
Efficiency 92 %
Peak intensity 6.2 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:

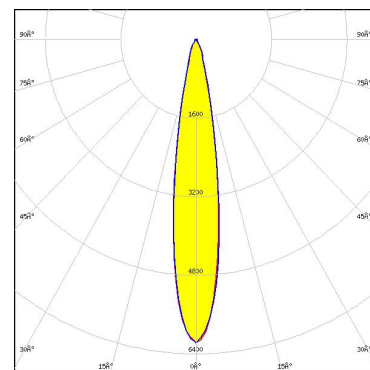

Light distribution files

OSRAM
Opto Semiconductors

LED OSLON SSL 80
FWHM / FWTM 16.0° / 33.0°
Efficiency 93 %
Peak intensity 6.9 cd/lm
LEDs/each optic 1
Light colour/type White
Required components:



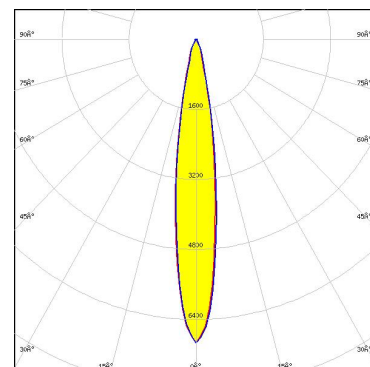


Light distribution files

OPTICAL RESULTS (SIMULATED):

OSRAM
Opto Semiconductors



LED SFH 4714A
FWHM / FWTM 14.0° / 27.0°
Efficiency 96 %
LEDs/each optic 1
Light colour/type IR
Required components:

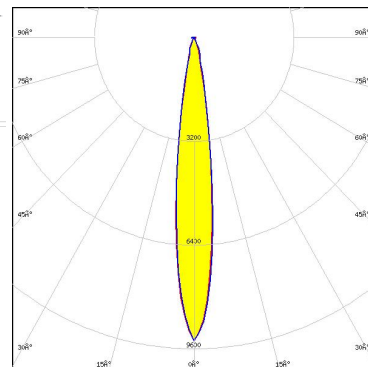

Light distribution files

OSRAM
Opto Semiconductors



LED SFH 4715AS
FWHM / FWTM 25.0° / 41.0°
Efficiency 93 %
LEDs/each optic 1
Light colour/type IR
Required components:

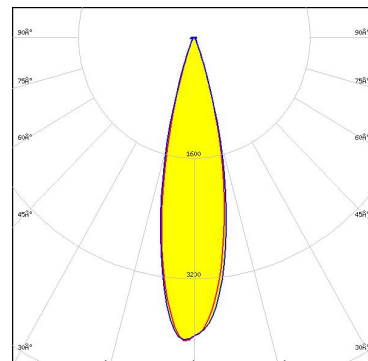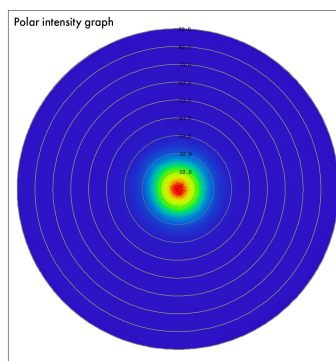

Light distribution files

OSRAM
Opto Semiconductors

LED SFH 4770S
FWHM / FWTM 16.0° / 34.0°
Efficiency 93 %
LEDs/each optic 1
Light colour/type IR
Required components:

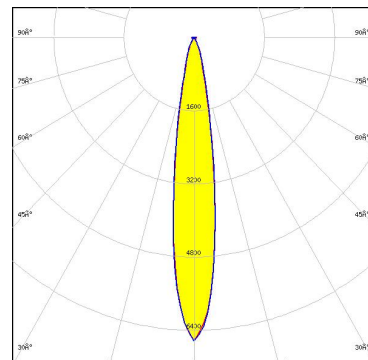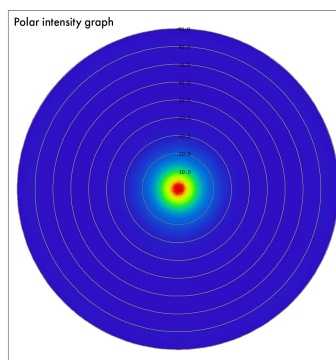


Light distribution files

OPTICAL RESULTS (SIMULATED):




LED Synios P2720 1/2 mm
 FWHM / FWTM 15.0° / 32.0°
 Efficiency 95 %
 Peak intensity 7.9 cd/Im
 LEDs/each optic 1
 Light colour/type White
 Required components:

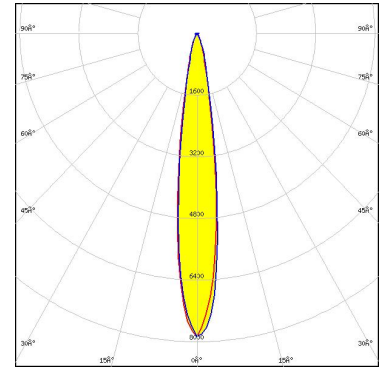

Light distribution files




LED Z5M3-E1
 FWHM / FWTM 28.0° / 52.0°
 Efficiency 95 %
 Peak intensity 2.9 cd/Im
 LEDs/each optic 1
 Light colour/type White
 Required components:

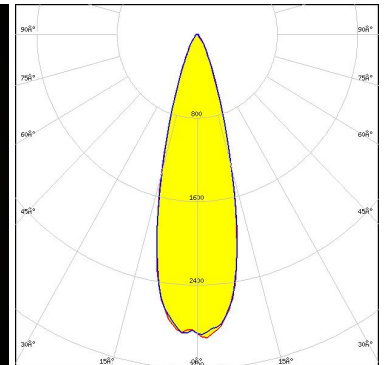

Light distribution files



LED Z5M4
 FWHM / FWTM 30.0° / 56.0°
 Efficiency 93 %
 Peak intensity 2.5 cd/Im
 LEDs/each optic 1
 Light colour/type White
 Required components:

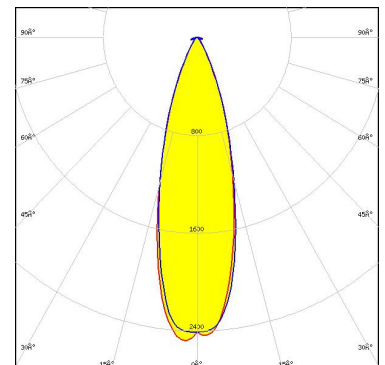

Light distribution files

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 7
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Poznan, Poland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)