

H

G

F

E


D

C


B

A


C18099\_TINA-Y-WW

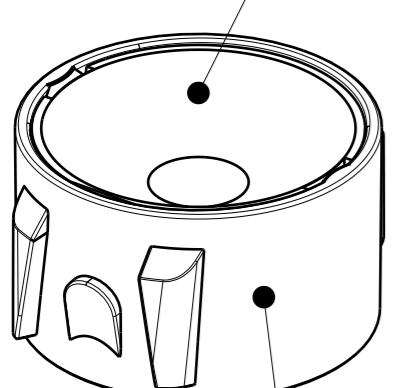


L20166\_TINA-Y-SC2-HLD-WHT

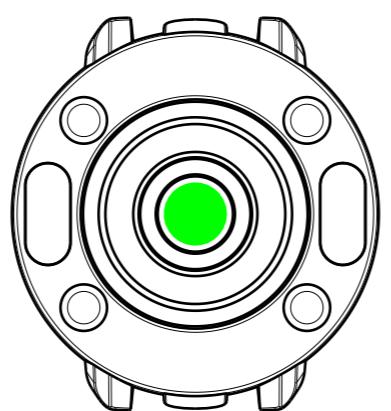




Recommended PAD design



Clip reference distance after soldering

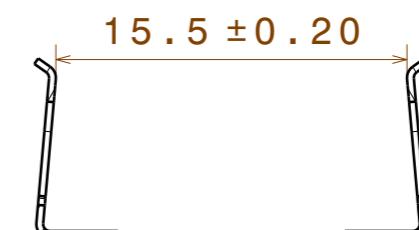

C18696\_SOLDER-CLIP-2

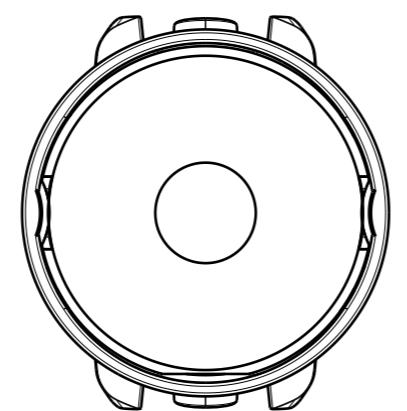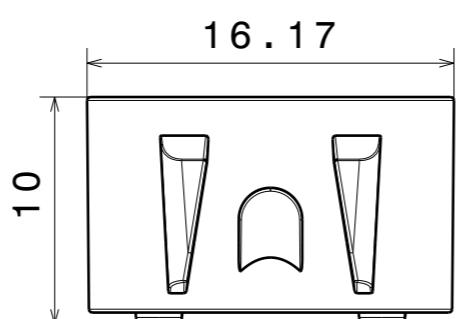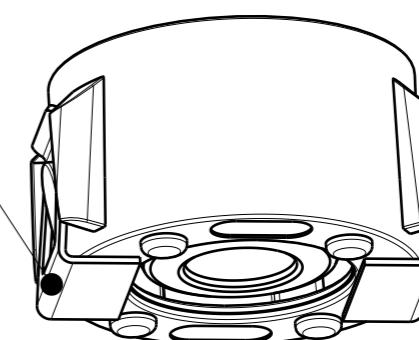Bottom of solder clip underneath holder  
Opening of solder clip facing holder

LP20180\_TINA-Y-SC2-WW-WHT

## COMPONENTS

INDEX	PART	TYPE	COUNT	MATERIAL	COLOR / COATING
1	C18099_TINA-Y-WW	LENS	1	PMMA	CLEAR
2	L20166_TINA-Y-SC2-HLD-WHT	HOLDER	1	PC	WHITE

## MECHANICAL DRAWING


PRODUCT

TINA-Y-SC2-WW

LEDiL

Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing.  
Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

## FIRST ANGLE PROJECTION:



This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.

SCALE 3:1

WEIGHT -

A3 SHEET 1/1

## Notes

- PCB or heatsink level.
- LED location
- Ensure LED fitting from a product specific 3D model available from [www.ledil.com](http://www.ledil.com)
- For more details about installation please see LEDiL Installation Guide on [www.ledil.com](http://www.ledil.com)