

H

G

F

E


D

C


B

A


C19887_TINA-Y-WWW

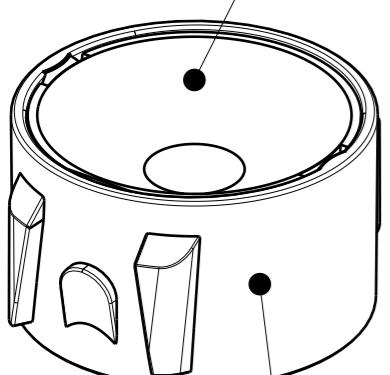


L20166_TINA-Y-SC2-HLD-WHT

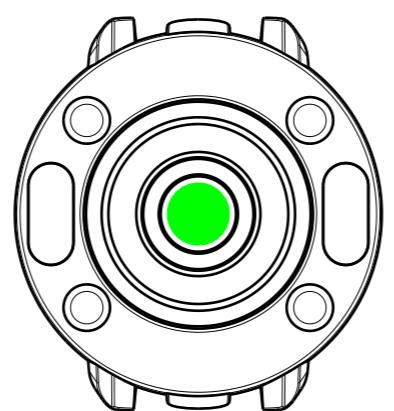


Recommended PAD design

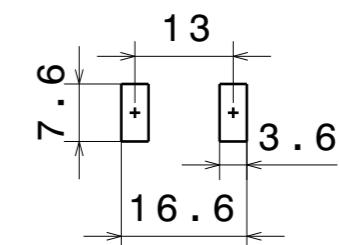

Clip reference distance after soldering

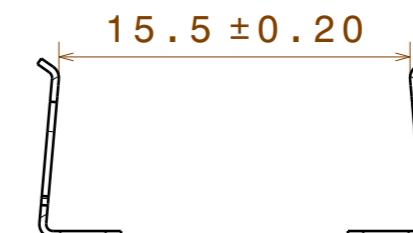

C18696_SOLDER-CLIP-2
 Bottom of solder clip underneath holder
 Opening of solder clip facing holder

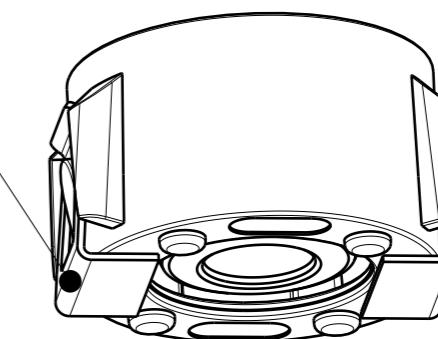

LP20181_TINA-Y-SC2-WWW-WHT

COMPONENTS

INDEX	PART	TYPE	COUNT	MATERIAL	COLOR / COATING
1	C19887_TINA-Y-WWW	LENS	1	PMMA	CLEAR
2	L20166_TINA-Y-SC2-HLD-WHT	HOLDER	1	PC	WHITE

MECHANICAL DRAWING


PRODUCT

TINA-Y-SC2-WWW

LEDiL

Plastic moulding general tolerances according to DIN 16901-130 and applies if not otherwise shown in the drawing.
 Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

FIRST ANGLE PROJECTION:



This drawing is the property of LEDiL Oy. It may not be copied or otherwise distributed without prior written permission from LEDiL Oy.

SCALE 3:1

WEIGHT -

A3 SHEET 1/1

Notes

PCB or heatsink level.
LED location
Ensure LED fitting from a product specific 3D model available from www.ledil.com
For more details about installation please see LEDiL Installation Guide on www.ledil.com