

## YASMEEN-30-RS

~11° spot beam

## SPECIFICATION:

Dimensions	Ø 29.7 mm
Height	18.2 mm
ROHS compliant	yes ⓘ


## MATERIALS:

Component	Type	Material	Colour	Finish	Length
YASMEEN-30-RS	Single lens	PMMA	clear		29.7

## ORDERING INFORMATION:

Component	Qty in box	MOQ	MPQ	Box weight (kg)
C17180_YASMEEN-30-RS » Box size: 480 x 280 x 300 mm	792	132	66	5.1




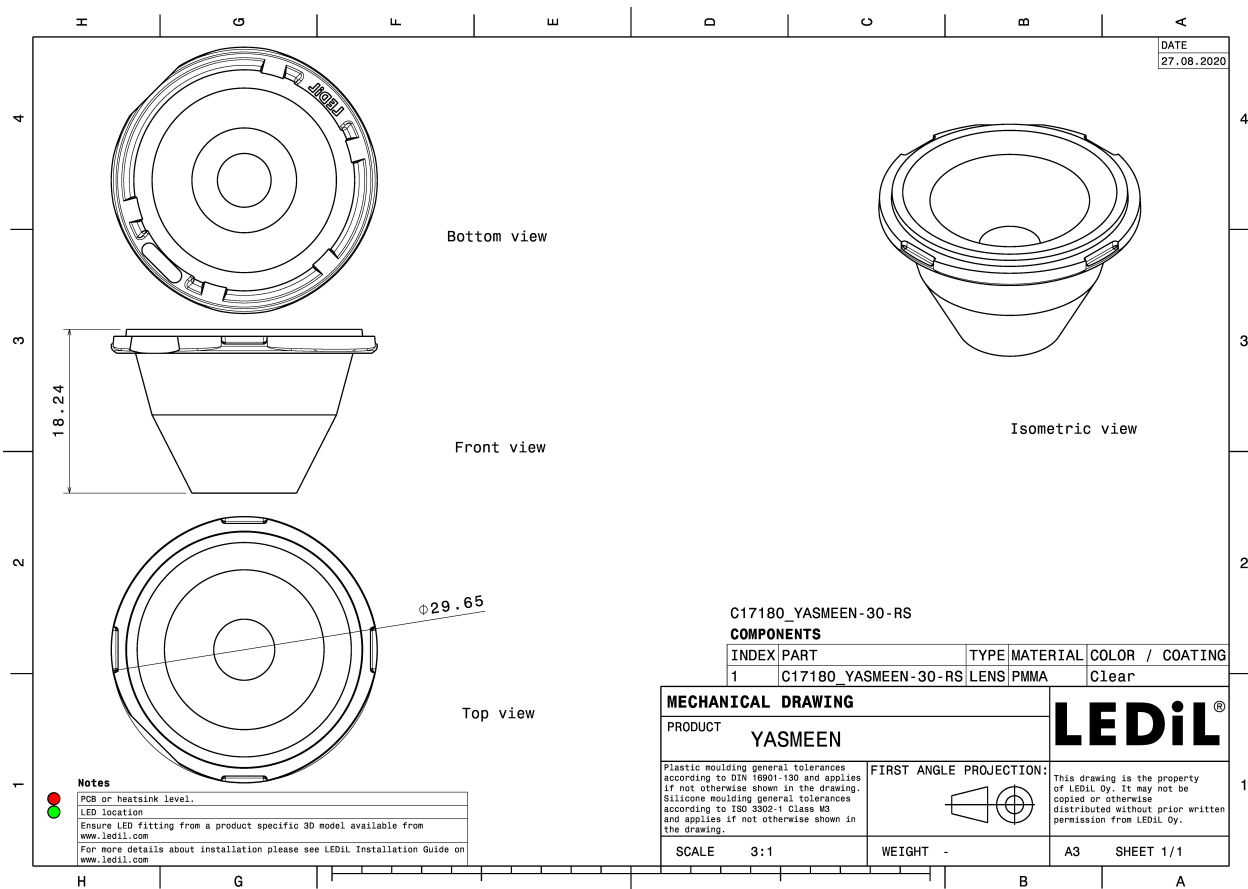


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)

### OPTICAL RESULTS (MEASURED):



LED Vesta TW 6mm DP  
 FWHM / FWTM 19.0° / 49.0°  
 Efficiency 83 %  
 Peak intensity 3.6 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

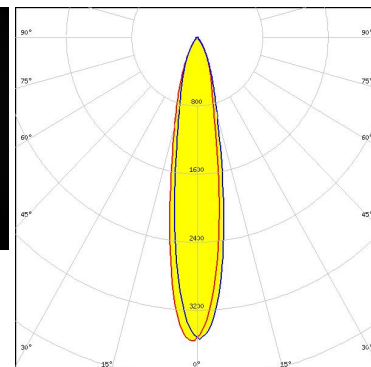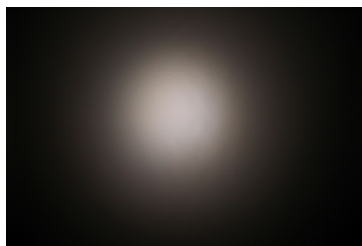


Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED V3 HD Gen 8  
 FWHM / FWTM 14.0° / 30.0°  
 Efficiency 95 %  
 Peak intensity 10 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

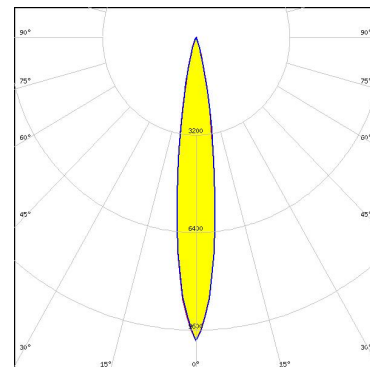

Light distribution files




LED V4 HD Gen 7  
 FWHM / FWTM 16.0° / 34.0°  
 Efficiency 94 %  
 Peak intensity 7.5 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

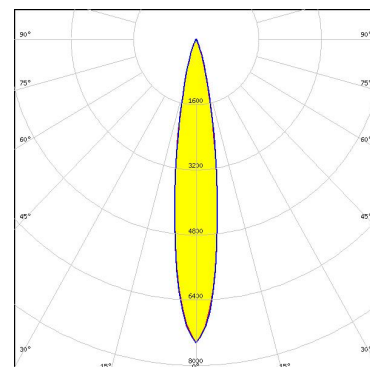

Light distribution files



LED V6 HD Gen 7  
 FWHM / FWTM 20.0° / 46.0°  
 Efficiency 93 %  
 Peak intensity 4.4 cd/lm  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

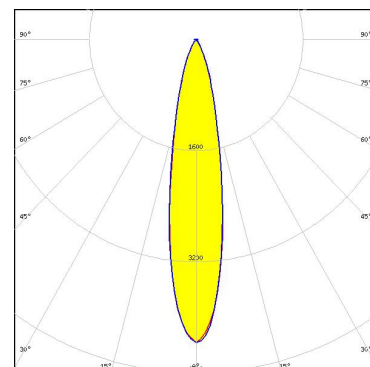


Light distribution files

#### OPTICAL RESULTS (SIMULATED):

#### CITIZEN


LED	CLU700/701/702/703
FWHM / FWTM	22.0° / 48.0°
Efficiency	93 %
Peak intensity	4.1 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

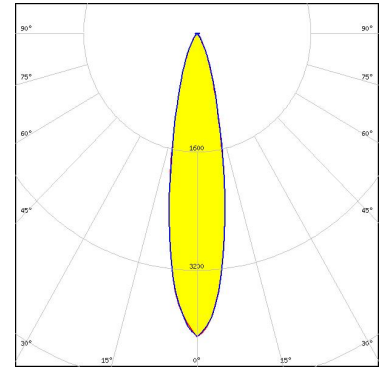

Light distribution files

#### CITIZEN


LED	CLU710/711
FWHM / FWTM	24.0° / 60.0°
Efficiency	87 %
Peak intensity	2.2 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

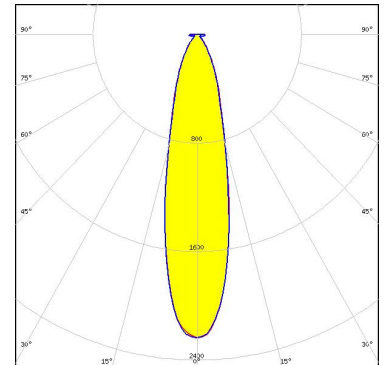

Light distribution files

#### CITIZEN

LED	CLU7A2/7A3
FWHM / FWTM	18.0° / 34.0°
Efficiency	94 %
Peak intensity	7.3 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

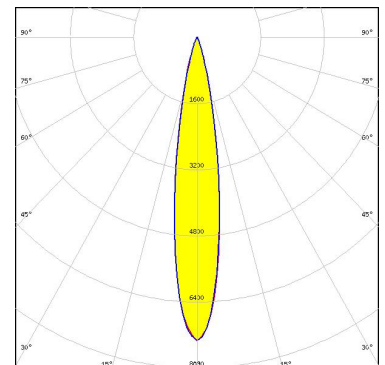


Light distribution files

#### OPTICAL RESULTS (SIMULATED):

#### CITIZEN


LED	CLU7B2
FWHM / FWTM	14.0° / 29.0°
Efficiency	95 %
Peak intensity	10.4 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

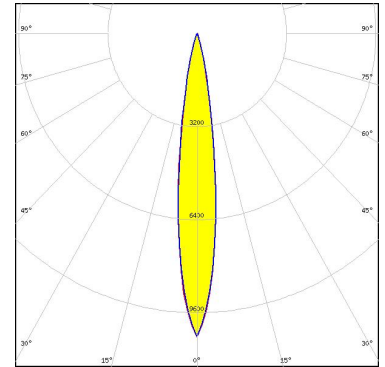

Light distribution files

#### CITIZEN


LED	CLU7S3
FWHM / FWTM	16.0° / 30.0°
Efficiency	92 %
Peak intensity	9.6 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

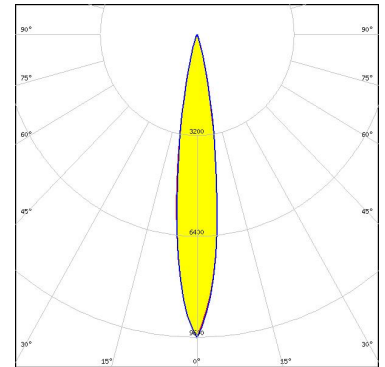

Light distribution files



LED	CMA1303
FWHM / FWTM	16.0° / 38.0°
Efficiency	94 %
Peak intensity	6.5 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

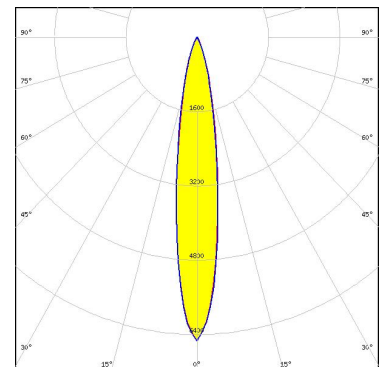


Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED XHP35 HI  
FWHM / FWTM 14.0° / 26.0°  
Efficiency 95 %  
Peak intensity 13.3 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

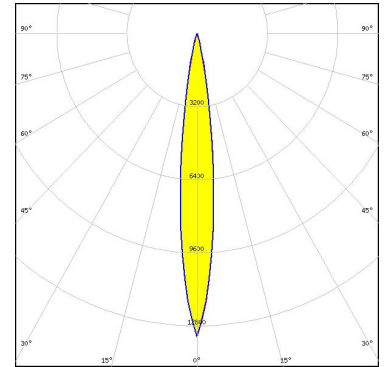

Light distribution files




LED XM-L  
FWHM / FWTM 14.0° / 28.0°  
Efficiency 94 %  
Peak intensity 11.5 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

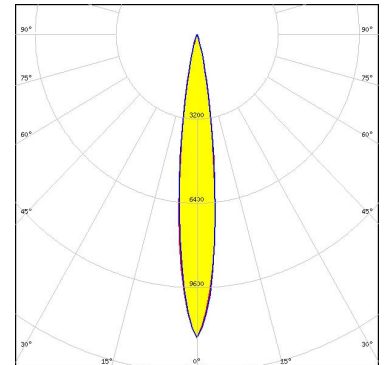

Light distribution files



LED XP-G2  
FWHM / FWTM 11.4° / 20.8°  
Efficiency 92 %  
Peak intensity 22.7 cd/lm  
LEDs/each optic 1  
Light colour/type White  
Required components:

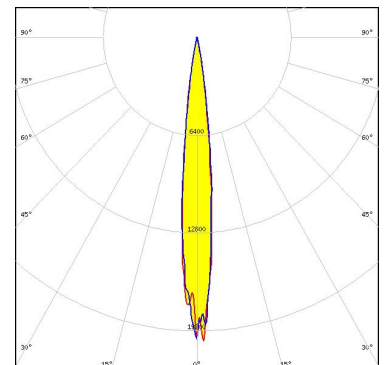


Light distribution files

#### OPTICAL RESULTS (SIMULATED):




LED XP-L HI  
 FWHM / FWTM 12.0° / 22.0°  
 Efficiency 95 %  
 Peak intensity 16.9 cd/Im  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

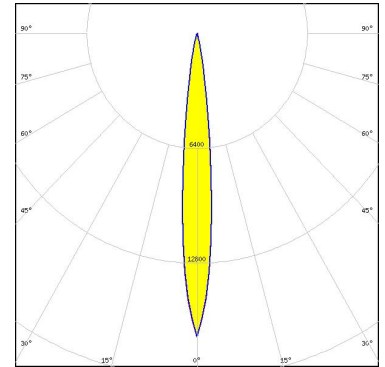

Light distribution files




LED NCSxE17A  
 FWHM / FWTM 10.0° / 22.0°  
 Efficiency 92 %  
 Peak intensity 16.5 cd/Im  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

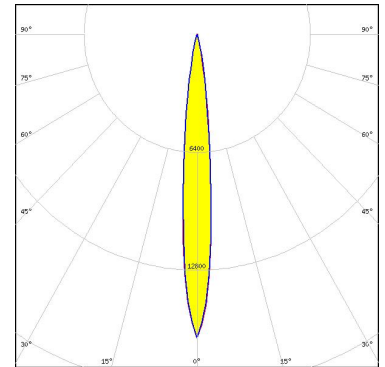

Light distribution files



LED NVSW719AC  
 FWHM / FWTM 12.0° / 22.0°  
 Efficiency 95 %  
 Peak intensity 16.8 cd/Im  
 LEDs/each optic 1  
 Light colour/type White  
 Required components:

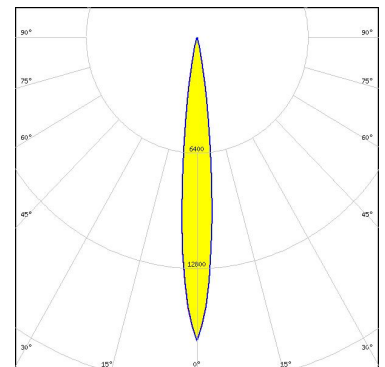


Light distribution files



### OPTICAL RESULTS (SIMULATED):



LED	NVSxE21A
FWHM / FWTM	12.0° / 24.0°
Efficiency	93 %
Peak intensity	14.2 cd/lm
LEDs/each optic	1
Light colour/type	White
Required components:	

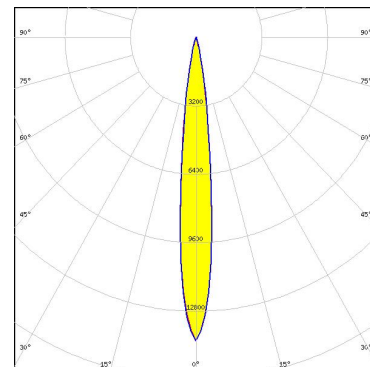

Light distribution files

### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Poznan, Poland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)